


## Fachadas Ventiladas con paneles Viroc - Estructura de Aluminio


Tornillos y remaches para la fijación de paneles Viroc

Paneles de 12 mm de espesor


### DRILLNOX STAR TB 5.5x50 W16

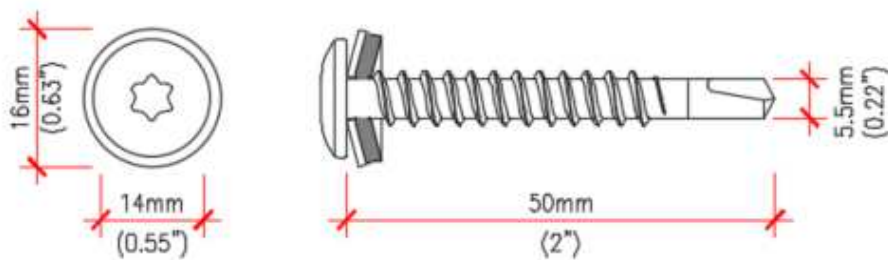

### STARZAC/2C 5.5x38 W16

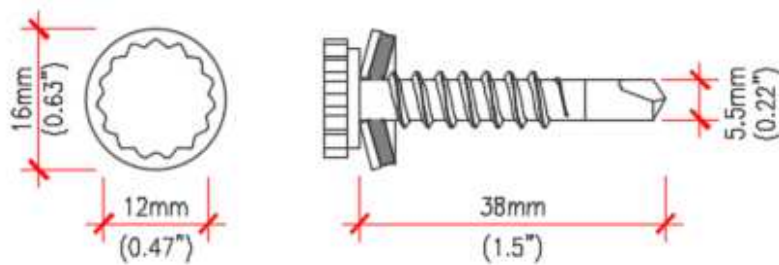


### Remache AL/In A2 N.E 4.8x18 CEL16 y RIVCOLOR AV/In N.E 4.8x18 CEL

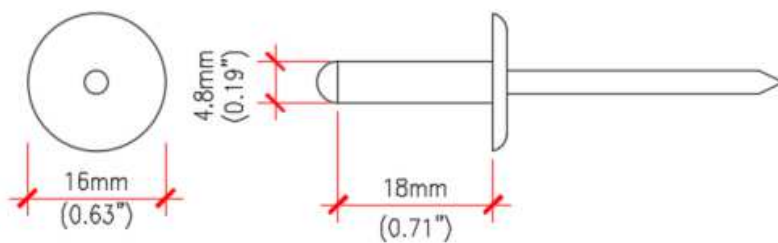


Accesorio: Riveter Nose, uso obligatorio

Paneles de 16 mm de espesor


DRILLNOX STAR TB 5.5x50 W16

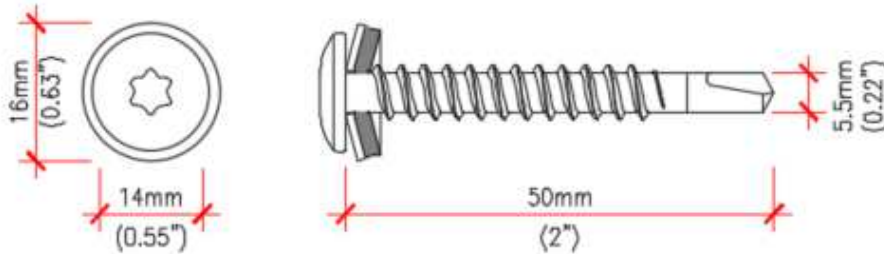

STARZAC/2C 6.3x50 W16

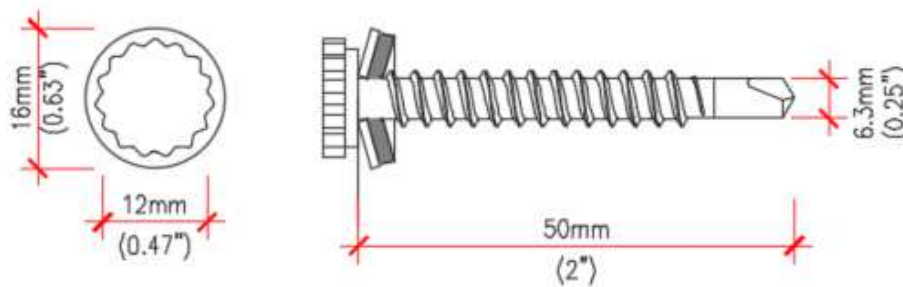

Remaches AL/In A2 N.E 4.8x22 CEL16 y RIVCOLOR AL/In N.E 4.8x22 CEL

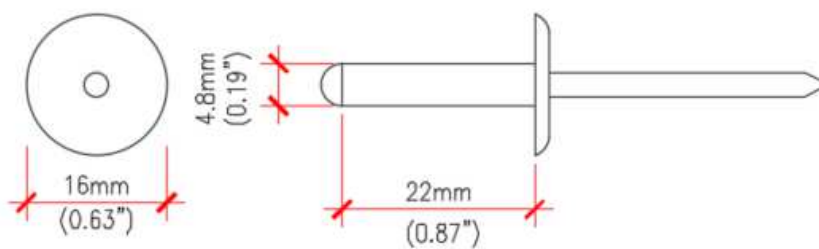

Accesorio: Riveter Nose, uso obligatorio

Riveter Nose



| RIVETER NOSE        |                |       |         |
|---------------------|----------------|-------|---------|
| For riveter         | Thread length. | Pack. | Code    |
| <b>ACCUBIRD</b>     | 8              | 1     | 611 111 |
| <b>LR 5 - LR 20</b> | 13             | 1     | 611 110 |

Estructura de soporte

Escuadras ISOLALU LR80



Aluminium 6063 T66  
+ Polyamide PA06 chargé de fibre  
de verre de couleur bleue

Équerre ISOLALU+ LR 80  
+ Cale THERMOSTOP

| L   | Ep. semelle | Dn <sub>mini</sub> | Dn <sub>maxi</sub> | Cond. | Code    |
|-----|-------------|--------------------|--------------------|-------|---------|
| 40  | 3           | 70                 | 70                 | 100   | 610 100 |
| 60  | 3           | 90                 | 90                 | 100   | 610 102 |
| 80  | 3           | 90                 | 110                | 100   | 610 104 |
| 100 | 3           | 110                | 130                | 100   | 610 106 |
| 120 | 3           | 130                | 150                | 100   | 610 108 |
| 140 | 3           | 150                | 170                | 50    | 610 110 |
| 160 | 4           | 170                | 190                | 50    | 610 112 |
| 180 | 4           | 190                | 210                | 50    | 610 114 |
| 200 | 4           | 210                | 230                | 50    | 610 116 |
| 220 | 4           | 230                | 250                | 50    | 610 118 |
| 240 | 4           | 250                | 270                | 50    | 610 120 |
| 260 | 4           | 270                | 290                | 50    | 610 122 |
| 280 | 4           | 290                | 310                | 50    | 610 124 |
| 300 | 4           | 310                | 330                | 50    | 610 126 |

Escuadras ISOLALU LR150




Aluminium 6063 T66  
+ Polyamide PA06 chargé de fibre  
de verre de couleur bleue

Équerre ISOLALU+ LR 150  
+ Cale THERMOSTOP

| L   | Ep. semelle | Dn <sub>mini</sub> | Dn <sub>maxi</sub> | Cond. | Code    |
|-----|-------------|--------------------|--------------------|-------|---------|
| 40  | 3           | 70                 | 70                 | 100   | 610 300 |
| 60  | 3           | 90                 | 90                 | 100   | 610 302 |
| 80  | 3           | 90                 | 110                | 100   | 610 304 |
| 100 | 3           | 110                | 130                | 100   | 610 306 |
| 120 | 3           | 130                | 150                | 100   | 610 308 |
| 140 | 3           | 150                | 170                | 50    | 610 310 |

Anclaje (escuadras-soporte)

MARCOVIS FM-X5 TF TX/SS A4 (1 un/ecuadra)



• Load: Up to 138 Kg

Polyamide PA6  
+ Screw in Carbon steel class 5.8  
zinc plated  $\geq 5 \mu\text{m}$


Polyamide PA6  
+ Austenitic stainless steel  
screw A4 - 50

**MARCOVIS FM-X5  
TF TX**


**MARCOVIS FM-X5  
TF TX / SS A4**

| $\varnothing$ / $t_{in}$ x l | d | Screw $l_s$ | $d_0$ | $h_1$ | Pack. | Code    | Pack. | Code    |
|------------------------------|---|-------------|-------|-------|-------|---------|-------|---------|
| 8 / 10 x 80                  | 6 | 85          | 8     | 80    | 100   | 360 500 | 100   | 360 550 |
| 8 / 30 x 100                 | 6 | 105         | 8     | 80    | 50    | 360 502 | 50    | 360 552 |
| 8 / 50 x 120                 | 6 | 125         | 8     | 80    | 50    | 360 504 | 50    | 360 554 |
| 8 / 80 x 150                 | 6 | 155         | 8     | 80    | 50    | 360 505 | 50    | 360 551 |
| 8 / 100 x 170                | 6 | 175         | 8     | 80    | 50    | 360 507 | 50    | 360 553 |
| 10 / 15 x 85                 | 7 | 90          | 10    | 80    | 50    | 360 506 | 50    | 360 556 |
| 10 / 30 x 100                | 7 | 105         | 10    | 80    | 50    | 360 508 | 50    | 360 558 |
| 10 / 45 x 115                | 7 | 120         | 10    | 80    | 50    | 360 510 | 50    | 360 560 |
| 10 / 65 x 135                | 7 | 140         | 10    | 80    | 50    | 360 512 | 50    | 360 562 |
| 10 / 90 x 160                | 7 | 165         | 10    | 80    | 50    | 360 514 | 50    | 360 564 |
| 10 / 130 x 200               | 7 | 205         | 10    | 80    | 50    | 360 516 | 50    | 360 566 |
| 10 / 160 x 230               | 7 | 235         | 10    | 80    | 50    | 360 518 | 50    | 360 568 |


Perfiles de aluminio T y L

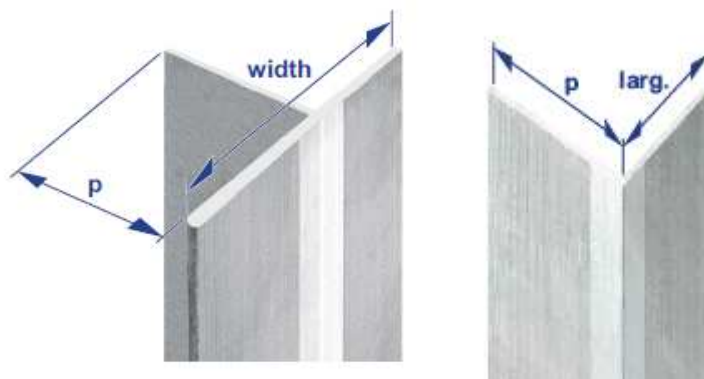

Perfiles FACALU T 140x52x2 o T 150x52x2,5

|  |        |         | Aluminium 6060 T5 |         |
|--|--------|---------|-------------------|---------|
|  |        |         | FACALU PROFILE T  |         |
| width x p  | Thick. | Lg, (m) | Pack.             | Code    |
| 140 x 52   | 2      | 3       | 1                 | 611 167 |
| 140 x 52   | 2      | 6       | 1                 | 611 127 |
| 150 x 52   | 2,5    | 3       | 1                 | 611 370 |
| 150 x 52   | 2,5    | 6       | 1                 | 611 139 |

Perfiles FACALU L 50x42x2, L 50x42x2.5 o L 50x50x3

|  |        |         | Aluminium 6063 T66 |         |
|---|--------|---------|--------------------|---------|
|   |        |         | FACALU PROFILE L   |         |
| width x p   | Thick. | Lg, (m) | Pack.              | Code    |
| 50 x 42   | 2      | 3       | 1                  | 611 036 |
| 50 x 42   | 2      | 6       | 1                  | 611 016 |
| 50 x 42   | 2,5    | 3       | 1                  | 611 049 |
| 50 x 42   | 2,5    | 6       | 1                  | 611 047 |
| 50 x 50   | 3      | 3       | 1                  | 611 462 |
| 50 x 50   | 3      | 6       | 1                  | 611 375 |

Tornillos (escuadra-perfil)

PERFIX TH In A2 5.5x25, (2 un/escuadra)



|                 |            |   |  |         |
|-----------------|------------|---|--|---------|
|                 |            |   | <b>Acier Inoxydable Austénitique<br/>A2 Aisi 304</b> |         |
|                 |            |   | <b>PERFIX TH<br/>In A2</b>                           |         |
| $\emptyset$ x L | CP sur Alu | H | Cond.  | Code    |
| <b>5,5 x 25</b> | 1,75 à 3   | 8 | 500  | 300 466 |



Remache N.E – CL Alu-Inox 5x12, (2 un/escuadra)



|                 |       |                       |         |   |         |
|-----------------|-------|-----------------------|---------|---|---------|
|                 |       |                       |         | <b>Alliage Aluminium/<br/>Acier inoxydable A2</b> |         |
|                 |       |                       |         | <b>RIVET N.E. - CL<br/>ALU-INOX</b>               |         |
| $\emptyset$ x L | $d_w$ | $S_{mini} / S_{maxi}$ | $d_0^*$ | Cond.   | Code    |
| <b>5 x 12</b>   | 14    | 4 / 8                 | 5,2     | 500   | 270 540 |

Anclaje plástico (aislamiento-suporte)

INCO Black



• Load: Up to 17 Kg



Black polypropylene

**INCO Black**

| $\emptyset$ / $t_{fix}$ x $l$ | $d_0^{\#}$ | $h_1$ | Pack. | Code    |
|-------------------------------|------------|-------|-------|---------|
| 8 / 40 x 60                   | 8          | 30    | 500   | 358 101 |
| 8 / 60 x 80                   | 8          | 30    | 500   | 358 102 |
| 8 / 80 x 100                  | 8          | 30    | 500   | 358 104 |
| 8 / 100 x 120                 | 8          | 30    | 250   | 358 105 |
| 10 / 40 x 70                  | 10         | 40    | 500   | 358 170 |
| 10 / 60 x 90                  | 10         | 40    | 500   | 358 172 |
| 10 / 80 x 110                 | 10         | 40    | 250   | 358 174 |
| 10 / 110 x 140                | 10         | 40    | 200   | 358 176 |

Llave para centrar, ML 1000



**DRILL CENTRING TOOL  
ML 1000**

| Model                 | Pack. | Code    |
|-----------------------|-------|---------|
| Centring tool ML 1000 | 1     | 284 000 |



## Perfiles angulares



| Pre-painted Aluminium<br>1 mm thickness |             |         |
|---|-------------|---------|
| P.A.S.<br>Al / PrL                      |             |         |
| For panel thick. (mm)                   | Pack. (m) * | Code    |
| 10                                      | 30          | 611 700 |
| 15                                      | 30          | 611 702 |
| 20                                      | 30          | 611 704 |

(\*) Packaging: One 10 x 3 meters bundle, cannot be split

- Colours std.: RAL 1013 / 1015 / 7016 / 7035 / 9001 / 9007 / 9010 / 9016 - RAL Painting and other widths available on request
- Facade application:
  - Decorative corner profile




| Pre-painted Aluminium<br>1 mm thickness |             |         |
|---|-------------|---------|
| P.A.R.<br>Al / PrL                      |             |         |
| For panel thick. (mm)                   | Pack. (m) * | Code    |
| 10                                      | 30          | 611 710 |
| 15                                      | 30          | 611 712 |
| 20                                      | 30          | 611 714 |

(\*) Packaging: One 10 x 3 meters bundle, cannot be split

- Colours std.: RAL 1013 / 1015 / 7016 / 7035 / 9001 / 9007 / 9010 / 9016 - RAL Painting and other widths available on request
- Facade application:
  - Decorative corner profile




## Banda adhesiva

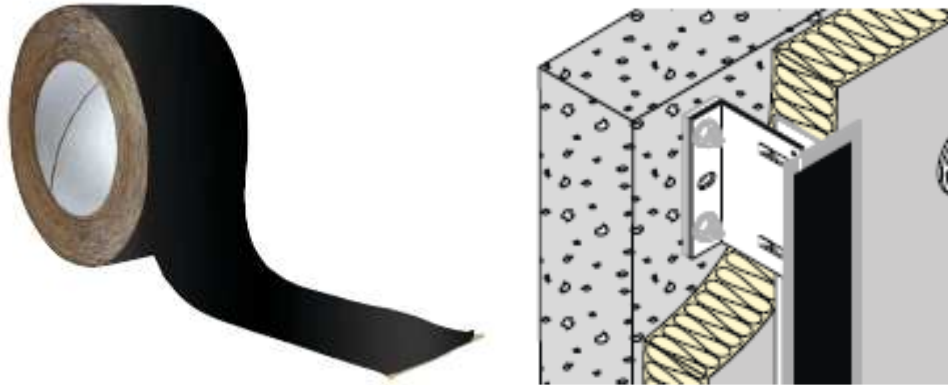

|        |       |               |           | Acrylic adhesive |         |
|--------|-------|---------------|-----------|------------------|---------|
|        |       |               |           | ADHESIVE BAND    |         |
| Colour | Width | Roll lg. (ml) | No. rolls | Pack. (m)        | Code    |
| Black  | 40    | 10            | 6         | 60               | 611 750 |
| Black  | 80    | 25            | 2         | 50               | 611 307 |
| Black  | 100   | 25            | 2         | 50               | 611 319 |
| Black  | 120   | 25            | 2         | 50               | 611 327 |

## Perfil anti-roedores

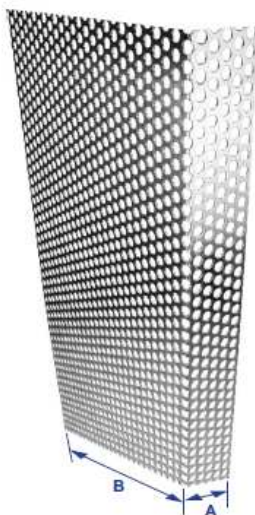

|    |     | Aluminium           |         |
|----|-----|---------------------|---------|
|    |     | RODENT-PROOF GRILLE |         |
|    |     | Alu                 |         |
| A  | B   | Pack. (m)           | Code    |
| 40 | 100 | 2,5                 | 668 090 |
| 40 | 120 | 2,5                 | 668 091 |
| 40 | 140 | 2,5                 | 668 092 |
| 40 | 160 | 2,5                 | 668 093 |
| 40 | 180 | 2,5                 | 668 094 |
| 40 | 200 | 2,5                 | 668 095 |
| 40 | 220 | 2,5                 | 668 096 |
| 40 | 240 | 2,5                 | 668 097 |

- Other widths available on request
- Facade application:
  - Start section for ventilated facade

Contactos para información y suministro

Portugal

Tel: +351 912 110 413

Email: [pedro.durao.etanco@gmail.com](mailto:pedro.durao.etanco@gmail.com)

Francia

UK

T :+33 01 34 80 52 08

T :+44 179 256 19 11

Email :export@etanco.fr

Email :commercial.france@etanco.fr

Etanco Bélgica

Etanco Alemania

T: +32 3 354 15 00

T: +49 27 39 47 99 64

Etanco Polonia

Etanco Rumania

Italia

T: + 48 55 24 22 926

T : +40 31 425 12 82

T :+39 04 327 479 11

T : +40 72 264 69 44

T :+39 02 990 480 62