Fachadas Ventiladas com painéis Viroc - Estrutura de Madeira

Parafusos para fixação dos painéis Viroc de 12 mm de espessura

TORX PANEL TB16 TX20-4.8x38 + Anilha neoprene 16mm

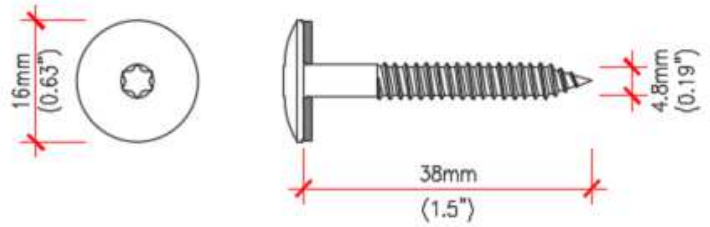

TORX PANEL TB12 TX20-4.8x38 A16

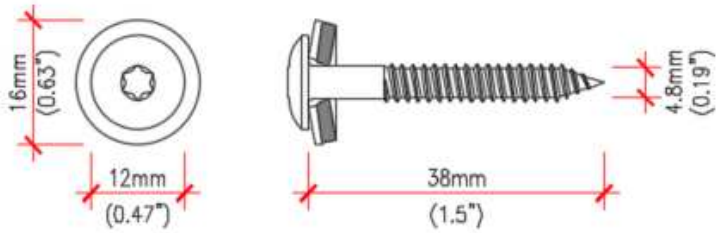

Parafusos para fixação dos painéis Viroc de 16 mm de espessura

TORX PANEL TB12 TX20-4.8x60 A16

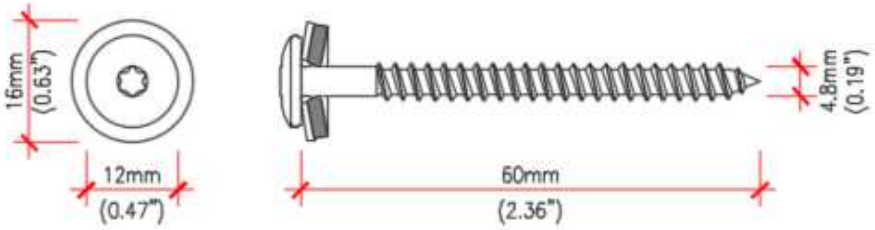

TORX PANEL TB16 TX20-4.8x60 + Anilha Neoprene 16mm

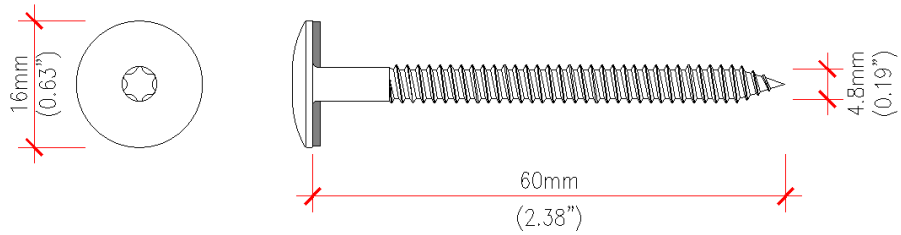

Estrutura de suporte

Esquadros



	Z450 galvanized SG 220 GD steel 2.5 mm thickness		Z450 galvanized SG 220 GD steel 2.5 mm thickness	
	ISOLCO 3000 P2 M8/Ga Opening 9x20		ISOLCO 3000 P2 M10/Ga Opening 11x20	
L	Pack.	Code	Pack.	Code
40	200	367 100	200	367 130
50	200	367 101	200	367 131
60	200	367 102	200	367 132
70	200	367 103	200	367 133
80	200	367 104	200	367 134
90	200	367 105	200	367 135
100	100	367 106	100	367 136
110	100	367 107	100	367 137
120	100	367 108	100	367 138
130	100	367 109	100	367 139
140	100	367 110	100	367 140
150	100	367 111	100	367 141
160	100	367 112	100	367 142
170	100	367 113	100	367 143
180	100	367 114	100	367 144
190	100	367 115	100	367 145
200	50	367 116	50	367 146
210	50	367 117	50	367 147
220	50	367 118	50	367 148
230	50	367 119	50	367 149
240	50	367 120	50	367 150
250	50	367 121	50	367 151
260	50	367 122	50	367 152
270	50	367 123	50	367 153
280	50	367 124	50	367 154
290	50	367 125	50	367 155
300	50	367 126	50	367 156

Ancoragem (esquadro-parede)

MARCOVIS FM-X5 TH 13 10/15x85, (1 un/esquadro)



Polyamide PA6
+ Screw in Carbon steel class 5.8
zinc plated ≥ 5 µm

MARCOVIS FM-X5 TH 13

Ø / t_{fix} x l	d	Screw l_s	d_0	h_1	Pack.	Code
10 / 15 x 85	7	90	**10**	80	Bucket 300	360 601

Parafusos (esquadro-barrote)

TIREFOND TH/SH 7x50, (2 un/esquadro)

SHERARDISÉ

Acier shérardisé
Résistance à la corrosion
600 heures au B.S.

TIREFOND TH/SH

Ø x L	H	Cond.	Code
7 x 50	13	100	19 802

Banda PVC ou EPDM

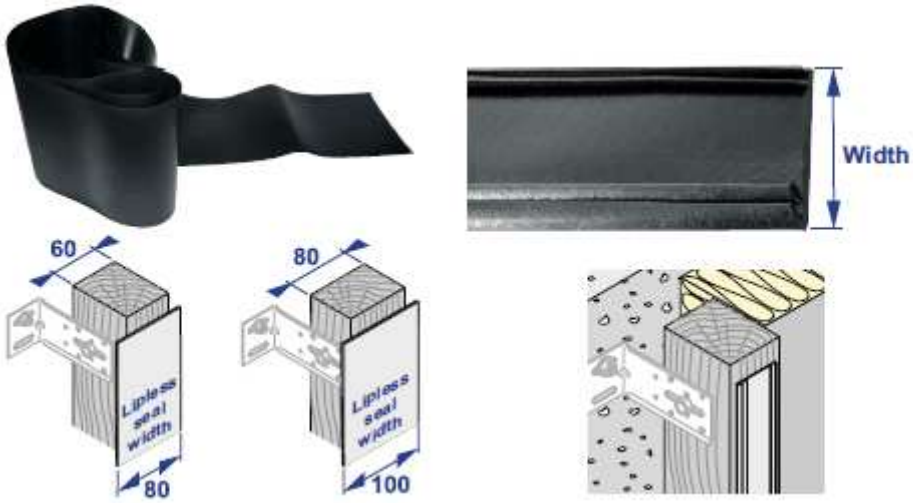

					Coloured PVC or EPDM	
					FLEXIBLE LIPLESS SEAL	
Width	**Material**	**Thick.**	**Colour**	**Ral**	**Pack. (m)**	**Code**
80	PVC	0,5	White	9010	50	366 520
80	PVC	0,5	Black	9011	50	366 523
80	EPDM*	0,8	Black	9011	50	366 536
100	PVC	0,5	White	9010	50	366 524
100	PVC	0,5	Black	9011	50	366 527
100	EPDM*	0,8	Black	9011	50	366 540
120	PVC	0,5	Black	9011	50	366 531

		Coloured PVC	
		PVC LIP SEAL	
Width	**Colour**	**Pack. (m)**	**Code**
38	White	50	366 501
38	Black	50	366 500
38	Grey	50	366 505
38	Brown	50	366 503
60	White	50	366 510
60	Black	50	366 512
60	Grey	50	366 516
60	Brown	50	366 514

Bucha plástica (isolamento-suporte)

INCO Black



• Load: Up to 17 Kg

Ø / t_{fix} x l	d_0 #	h_1	Black polypropylene INCO Black Pack.	Code
8 / 40 x 60	8	30	500	358 101
8 / 60 x 80	8	30	500	358 102
8 / 80 x 100	8	30	500	358 104
8 / 100 x 120	8	30	250	358 105
10 / 40 x 70	10	40	500	358 170
10 / 60 x 90	10	40	500	358 172
10 / 80 x 110	10	40	250	358 174
10 / 110 x 140	10	40	200	358 176

Chave centradora, ML 1000

Model	DRILL CENTRING TOOL ML 1000 Pack.	Code
Centring tool ML 1000	1	284 000

Perfis auxiliar de angulo

	Pre-painted Aluminium 1 mm thickness
	P.A.S. Al / PrL
For panel thick. (mm)	Pack. (m) * / Code
10	30 / 611 700
15	30 / 611 702
20	30 / 611 704

(*) Packaging: One 10 x 3 meters bundle, cannot be split

- Colours std.: RAL 1013 / 1015 / 7016 / 7035 / 9001 / 9007 / 9010 / 9016 - RAL Painting and other widths available on request
- **Facade application:**
  - Decorative corner profile

	Pre-painted Aluminium 1 mm thickness
	P.A.R. Al / PrL
For panel thick. (mm)	Pack. (m) * / Code
10	30 / 611 710
15	30 / 611 712
20	30 / 611 714

(*) Packaging: One 10 x 3 meters bundle, cannot be split

- Colours std.: RAL 1013 / 1015 / 7016 / 7035 / 9001 / 9007 / 9010 / 9016 - RAL Painting and other widths available on request
- **Facade application:**
  - Decorative corner profile

Placa de angulo

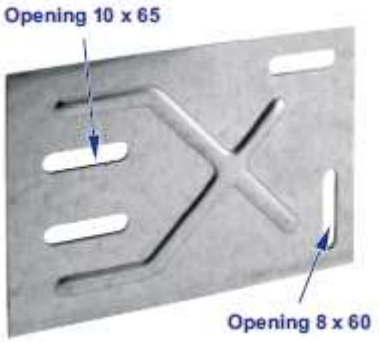



		Galvanized steel Z 450 2.5 mm thickness	
		CORNER PLATE	
Ht	L	Pack.	Code
120	180	25	367 240

Perfil anti-roedores

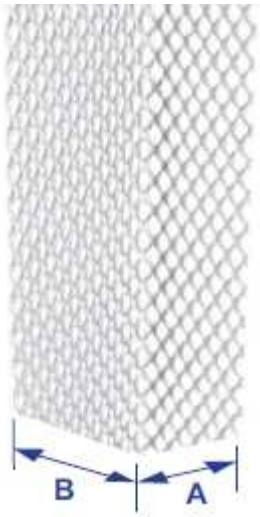

		Galvanized carbon steel RODENT-PROOF GRILLE / Ga	
A	B	Pack.	Code
30	40	1	666 377
30	50	1	666 376
30	60	1	666 375
30	70	1	666 374
30	80	1	666 373
30	90	1	666 372
30	100	1	666 371
30	110	1	666 370
30	120	1	666 369
30	130	1	666 368
30	140	1	666 367
30	150	1	666 366
30	160	1	666 365
30	170	1	666 364
30	180	1	666 363
30	190	1	666 362
30	200	1	666 361
30	210	1	666 360
30	220	1	666 359
30	230	1	666 358
30	240	1	666 357
30	250	1	666 356
30	260	1	666 355

Contactos para informação e fornecimento

Portugal

Tel: +351 912 110 413

Email: pedro.durao.etanco@gmail.com

França

Tel :+33 01 34 80 52 08

Email :export@etanco.fr

Email :commercial.france@etanco.fr

UK

Tel :+44 179 256 19 11

Etanco Bélgica

Tel: +32 3 354 15 00

Etanco Alemanha

Tel: +49 27 39 47 99 64

Etanco Polonia

Tel: + 48 55 24 22 926

Etanco Roménia

Tel : +40 31 425 12 82

Tel : +40 72 264 69 44

Itália

Tel :+39 04 327 479 11

Tel :+39 02 990 480 62