Fachadas Ventiladas con paneles Viroc - Estructura de Madera

Tornillos para la fijación de paneles Viroc

Paneles de 12 mm de espesor

TW-S-D16-4.8x38 W16

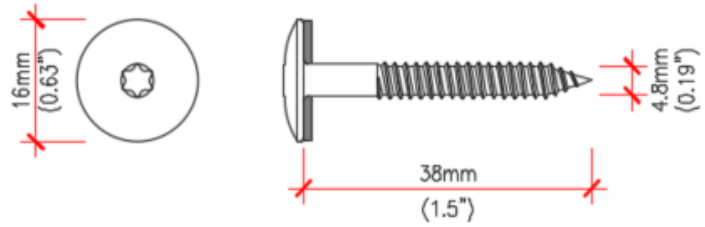

TW-S-D12-S16-4.8x38

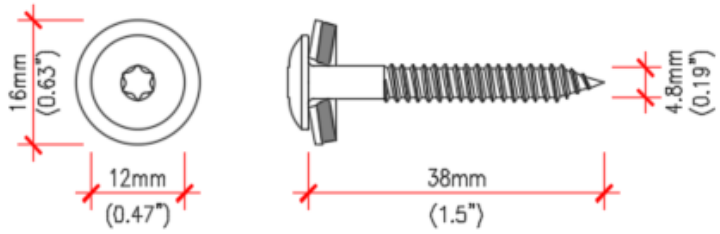

Paneles de 16 mm de espesor

TW-S-D12-S16-4.8x44

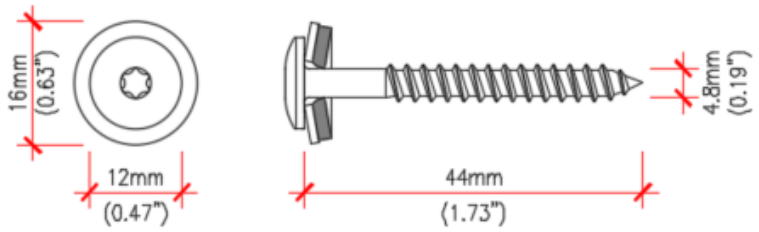

TW-S-D12-S16-4.8x60

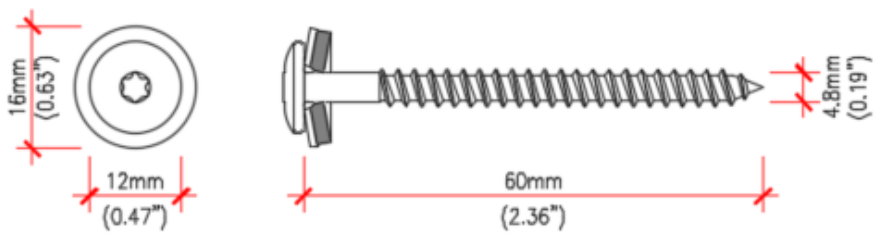

Estructura de soporte

Escuadras

		B	50-T		
Application	Product	Type	L	KL	Application range
	■ Carbon steel	B	50-T		Fixed width A of 50 mm Length L. variable from 5 0 to 300 mm Fixed height H of 60 mm 8.5x30 mm and 8.5xL mm slot holes Holes dia Ø 6.5 
		B	60-T		
		B	70-T		
		B	80-T		
		B	90-T		
		B	100-T		
		B	110-T		
		B	120-T		
		B	130-T		
		B	140-T		
		B	150-T		
		B	160-T		
		B	170-T		
		B	180-T		
		B	190-T		
		B	200-T		
		B	210-T		
		B	220-T		
		B	230-T		
		B	240-T		
		B	250-T		
		B	260-T		
		B	270-T		
		B	280-T		
		B	290-T		
		B	300-T		

Anclaje (escuadras-soporte)

FUR-10,0x80-SS (1 un/escuadra)

Application	Product	Approval	Order code FUR-	8,0x	80-SS	t_{fix}	h_2	Application range
			Type	d	L			
	■ Carbon steel	CE	FUR-	8,0x	80-SS	**10**	**90**	Anchoring depth h_{nom} min. 70 mm embedment  Drill bit for concrete: Ø 8mm: SDS4–Plus–8xL Ø 10mm: SDS4–Plus–10xL
			FUR-	8,0x	100-SS	**30**	**110**	
			FUR-	8,0x	120-SS	**50**	**130**	
			FUR-	10,0x	80-SS	**10**	**90**	
			FUR-	10,0x	100-SS	**30**	**110**	
			FUR-	10,0x	115-SS	**45**	**125**	
			FUR-	10,0x	135-SS	**65**	**145**	
			FUR-	10,0x	160-SS	**90**	**170**	
			FUR-	10,0x	185-SS	**115**	**195**	
			FUR-	10,0x	200-SS	**130**	**210**	
			FUR-	10,0x	230-SS	**160**	**240**	

Tornillos (escuadra-perfil de madera)

SW-T-4,8x35 (3 un/escuadra) o

SW3-T-H15-6,5x50 (2 un/escuadra)

Application	Product	Approval	Order code SW-T-		4,8x	35	KL	Application range
			Type	HD	d	L		
	■ Carbon steel 	CSTB	SW-T-		4,8x	35		VD max. steel: 1 x1,0 mm 3 x0,75 mm Assembly recommendations: 3 x SW-T-4,8x35 for long hole Ø 6,5 mm
	■ Carbon steel	CSTB	SW3-T-	H15-	6,5x	50		 VD max. steel: 2 x1,25 mm Assembly recommendations: 1 x SW3-T-H15-6,5x50 for long hole 1 x SW-T-4,8x35 for normal hole

Banda EPDM



Product code	article number	d x L	PU	notes
EPDM-TAPE-0,75X60X25000	1122506	0,75X60X25 M	1	
EPDM-TAPE-0,75X80X25000	1193862	0,75X80X25 M	1	
EPDM-TAPE-0,75X100X25000	1122504	0,75X100X25 M	1	
EPDM-TAPE-0,75X120X25000	1288745	0,75X120X25 M	1	
EPDM-TAPE-1,2X70X25000	1379293	1,2X70X25 M	1	
EPDM-TAPE-1,2X120X25000	1379294	1,2X120X25 M	1	
EPDM-TAPE-ADHESIVE-0,75X60X25000	1122507	0,75X60X25 M	1	
EPDM-TAPE-ADHESIVE-0,75X100X25000	1122508	0,75X100X25 M	1	
EPDM-TAPE-ADHESIVE-0,75X120X25000	1329007	0,75X120X25 M	1	
EPDM-TAPE-ADHESIVE-1,2X110X25000	1386718	1,2X110X25 M	1	

Anclaje plástico (aislamiento-suporte)



d diameter | **L** overall length | **SD** Setting depth | **All measures in mm**

Applications	Product	Order code MDH- 8,0x 60 Type	d	L	SD	Application range
 	● Plastic	MDH-	8,0x	60	**20**	 
		MDH-	8,0x	80	**20**	
		MDH-	8,0x	100	**20**	
		MDH-	8,0x	120	**20**	
		MDH-	8,0x	140	**20**	
		MDH-	8,0x	160	**20**	
		MDH-	8,0x	180*	**30**	 
		MDH-	8,0x	200*	**30**	
		MDH-	8,0x	220*	**30**	
		MDH-	8,0x	240*	**30**	

* two pieces

1. Drill a pilot hole
2. Set plug until head lies flush on insulation
3. Use a hammer for installation
4. MDH has to be hammered precisely onto insulation

Accesorios

Llave para centrar tornillos con un diámetro de 4,8 mm, ZL-SLA-4.8/7

Perfil angular, auxiliar

PFS-K-Aluminium

		PFS-K-A-	10/10		
Application	Product	Type	axb	KL	Application range
	▲ Aluminium	PFS-K-A- 10/10 PFS-K-A- 18/18 PFS-K-A- 29/29 PFS-K-A- 40/40		≤ **10** ≤ **18** ≤ **29** ≤ **40**	Length of the profile: L = 2,8 m Thickness: e = 0,8 mm



PFS-Q-Aluminium

		PFS-Q-A-	10/10		
Application	Product	Type	axb	KL	Application range
	▲ Aluminium	PFS-Q-A- 10/10 PFS-Q-A- 18/18		≤ **10** ≤ **18**	Length of the profile: L = 2,8 m Thickness: e = 0,8 mm



PFR-Aluminium

		PFR-A-	10/10		
Application	Product	Type	axb	KL	Application range
	▲ Aluminium	PFR-A- 10/10 PFR-A- 15/15 PFR-A- 18/18		≤ **10** ≤ **15** ≤ **18**	Length of the profile: L = 2,8 m Thickness: e = 0,8 mm



Perfiles anti roedores

PV-Aluminium

Application	Product	PV-A- 30x30 Type	hxl	KL	Application range
	▲ Aluminium	PV-A-	30x30		Length of the profile: L = 2,5 m Thickness: e = 0,8 mm 
		PV-A-	30x40		
		PV-A-	30x50		
		PV-A-	30x60		
		PV-A-	30x70		
		PV-A	30x90		
		PV-A-	40x100		
		PV-A-	40x120		
		PV-A-	40x140		
		PV-A-	40x160		
		PV-A-	40x180		
		PV-A-	40x200		
		PV-A-	40x220		
		PV-A-	40x240		
		PV-A-	40x260		
		PV-A-	40x280		
		PV-A-	40x300		

Contactos para información y subministro

España / Portugal

Jordi Casulleras

T +34 946 33 31 20 M +34 609 00 59 01

jorge.casulleras@sfs.com, es.sfs.com

Francia

T: +33 4 75 75 44 22

E: fr.info@sfs.com

UK

T: +44 (0) 330 0555 888

E: ukenquiries@sfs.com

USA

T: +1 610 376 5751

E: us.construction@sfs.com

Canadá

T: +1 905 847 5400

E: ca.info@sfs.com

Norway

T: +47 67 92 14 40

E: no.info@sfs.com

Sweden

T: +46 152 71 50 00

E: se.info@sfs.com

Finland

T: +358 9 3154 9810

E: fi.info@sfs.com

Nederland

T: +31 492 597 414

E: bnl.info@sfs.com

Polnad

T: +48 61 660 49 00

E: pl.info@sfs.com

Italy

T: +39 0434 995 1

E: it.info@sfs.com

Germany

T: +49 6171 700 20

E: de.info@sfs.com

Czech Republic

T: +420 481 354 4111

E: cz.construction@sfs.com

Estonia

T: +372 6610 600

E : ee.info@sfs.com